

## Site (Data) : ZWILAG

Stock of waste as at December 2008

Country: SWITZERLAND

Reporting Year: 2008

Site Name: ZWILAG



Full Name: Zentrales Zwischenlager Würenlingen

Inventory Reporting Date: December 2008

Waste Matrix Used: KEV 2004

## Waste Inventory

Est=distribution is an estimate, Proc.=Is the waste processed (Yes/No)? RO=Reactor Operations, FF/FE=Fuel Fabrication/Fuel Enrichment, RP=Reprocessing, NA=Nuclear Applications,DF=Defence, DC/RE=Decommissioning/Remediation, ND=Not Determined

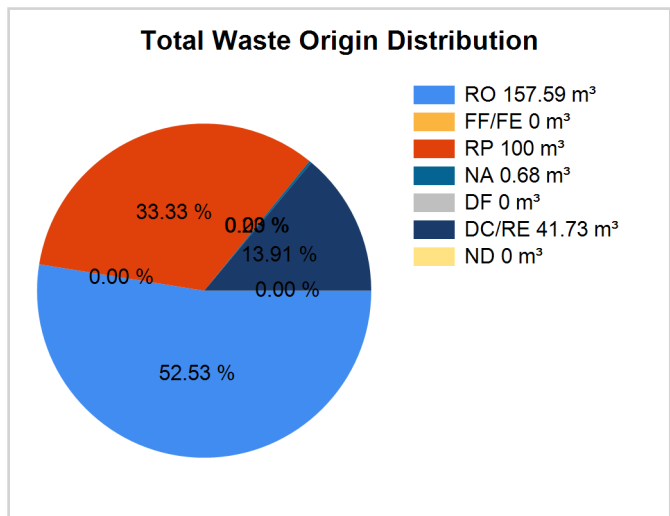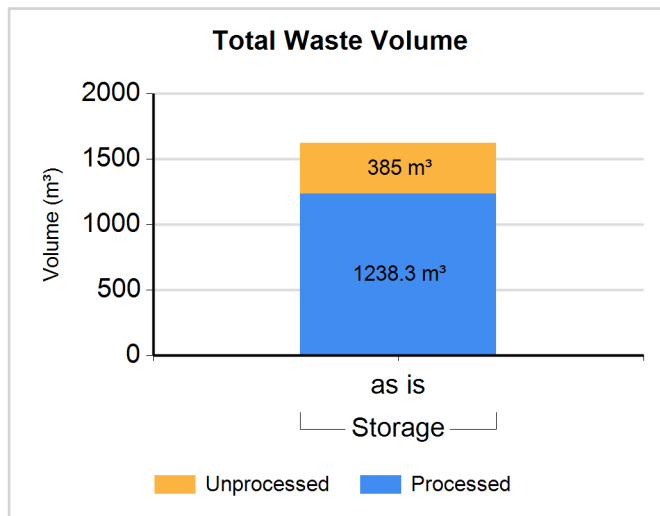

Note: where volume "as dispo" is provided, volume "as is" is used in the graph instead.

## Waste Class: SMA

Waste Class Name	Location / Facility	Proc	Est.	Volume "as is" (m³)	Volume "as dispo" (m³)	RO %	FF/FE %	RP %	NA %	DF %	DC/RE %	ND %
SMA	Storage	Y	N	1198.000	1198.000	98.94	0.00	0.00	0.00	0.00	1.06	0.00

## Waste Class: HAA

Waste Class Name	Location / Facility	Proc	Est.	Volume "as is" (m³)	Volume "as dispo" (m³)	RO %	FF/FE %	RP %	NA %	DF %	DC/RE %	ND %
HAA	Storage	Y	N	40.300	40.300	0.00	0.00	100.00	0.00	0.00	0.00	0.00

## Waste Class: SMA ybc

Waste Class Name	Location / Facility	Proc	Est.	Volume "as is" (m³)	Volume "as dispo" (m³)	RO %	FF/FE %	RP %	NA %	DF %	DC/RE %	ND %
SMA ybc	Storage	N	N	385.000	385.000	58.65	0.00	0.00	0.68	0.00	40.67	0.00

## Site (Data) : ZWILAG

Stock of waste as at December 2008

Country: SWITZERLAND

Reporting Year: 2008

**Processing - Treatment method(s)**

Method	Status			
	Planned	R&D program	Current practice method use over the last 5 years	Past Practice
Decontamination	N	N	Increase	N
Incineration	N	N	Increase	N
Metal Melting	N	N	Increase	N
Super Compaction	N	Y		N

**Processing - Conditioning method(s)**

Method	Status			
	Planned	R&D program	Current practice method use over the last 5 years	Past Practice
Casting (of metal and slag)	N	N	Same	N
Cementation	N	Y		N
Grouting	N	N	Increase	N

Comment **# 9721: ZWILAG Plasma Arc Incinerator/Melter**

Facility designed to incinerate/decompose/melt mixed waste (organics, metals, inorganics) fed in drums by very high temperature treatment.. Primary process residues are molten slag (non-metallic residues immersed into molten glass) and molten metals. These are casted into 145 l moulds. After waste product solidification by cooling, the moulds are overpacked in 200 l drums.

Active commissioning of the facility has started in November 2004. Until the end of 2008, 587 drums have been produced within 9 test campaigns. Application for definitive licensing is expected for 2009.